


## COVER TAPE

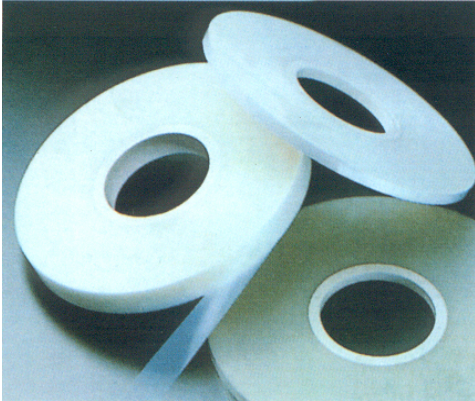

### DESCRIPTION

ENCOVER TAPETAPE REFERS TO SEMI-TRANSPARENT, ANTISTATIC COVER TAPE WITH A HEAT-ACTIVATED ADHESIVE SUITABLE, IN CONJUNCTION WITH EMBOSSED CARRIER TAPE TO BEST PROTECTION AND PEEL-OFF CONDITIONS FOR AUTOMATIC INSERTION OF COMPONENTS.

### DIMENSIONS

ENCOVER TAPE COMES WOUND ONTO 3" CORE, IN LENGTH, AND IS AVAILABLE IN THE FOLLOWING WIDTHS 5.3, 9.2, 13.3, 21.0, 21.3, 25.5, 37.5, 49.5, SLITTING TOLERANCE FOR ALL WIDTH IS +/-0.1mm. CUSTOM WIDTHS AND LENGTHS ARE AVAILABLE UPON REQUEST.

### SEALING ANODITIONS

TEMPERATURE	175°C
SEALING TIME	0.1~1.0 SECONDS
SHOE WIDTH	0.015~0.020 INCHES
PRESSURE	10~30psi

### PROPERTIES

	VALUE	METHOD
SURFACE RESISTIVITY	PET10 <sup>11</sup> SEALANT10 <sup>8</sup>	ASTM D 257
TENSILE STRENGTH	MD 28,000 psi TD 36,000 psi	ASTM D882A
ELOGATION	MD 150% TD100%	"
THICKNESS	0.048mm+/-0.001	
STATIC DECAY 5kv	LESS THAN 1 SECONDS	MIL B-81705